






## FlexiBasic

Height adjustable frame for worktop For residential housing or independent living projects, etc. Perfect for larger projects

- FlexiBasic is the worktop system for kitchens where height adjustment is only required occasionally.
- It allows fast adjustment of worktops up to 3 metres long, eventually including inset sink or hobs.
- It is not possible for the user to adjust themself, but one caretaker or handyman with a ROPOX Jack-up can effortlessly adjust the height required over a 30cm range.
- Only one Jack-up is required for all FlexiBasic and VertiBasic (wall unit) frames, so the system is particularly suited to projects with several kitchens that may need adjustment.
- The system can be upgraded to the FlexiManual (winding handle) or the FlexiElectric if required in the future.
- FlexiBasic is a really economical solution for kitchens for residential homes or independent living projects.

## FlexiBasic

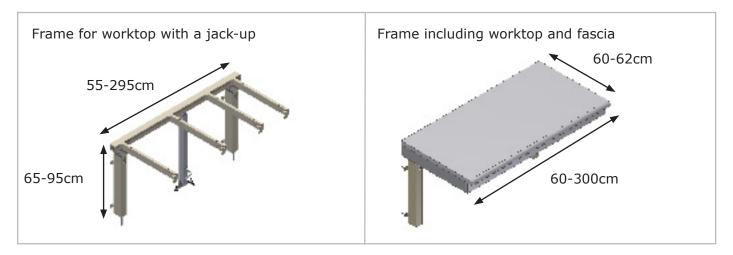

Models/	30-63060/	30-63105/	30-63155/	30-63205/	30-63255/
Item	30-63100	30-63150	30-63200	30-63250	30-63300
Length of worktop	60 - 100cm	105 - 150cm	155 - 200cm	205 - 250cm	255 - 300cm

\* Max. distance between legs is 200cm - it is possible to order Flexi frames with three legs.



Elevation of frame with Jack-up

## **ROPOX** Tips

- An upstand fitted to the back of the worktop will prevent items falling behind the worktop.
- Allow a space of 3-5mms around the worktop.
- Use fascia panels of 5-8cm at the front of the frame.
- The legs are designed to be fitted into a strong substrate but feet are available for weaker walls.
- It is not necessary to remount the worktop before adjusting the height. Simply locate the Jack-up below the centre of the frame and the floor, release the two locking nuts, wind to the height required and tighten the locking nuts.
- The Jack-up is kept in a central place.
- Maximum load on the frame is 150kg evenly distributed over the entire frame.

Accessories:

Jack-up

Cover





ROPOX A/S Ringstedgade 221 DK-4700 Naestved Tel. +45 5575 0500 Fax +45 5575 0550 info@ropox.dk www.ropox.com